



Anand-Sojitra Road, P.O. Box-22 V.U. Nagar, Gujarat 388 121. INDIA. Tel.: +91 2692 231316, 232309, 237565 Fax: +91 2692 236478

Cell: +91 94263 16200, 98257 35536 Email: warmstream@warmstream.co.in

www.warmstream.co.in www.warmstream.com

Nationwide Dealer & Service Network


#### One Year Full Value Guarantee

If the tank should leak within one year of installation.
We provide either free repairing or complete replacement at our option.
Customer would bear all the transport & incidential expenses both ways.

Indian Patent No: 145295



ISO 9001: 2008 CERTIFIED

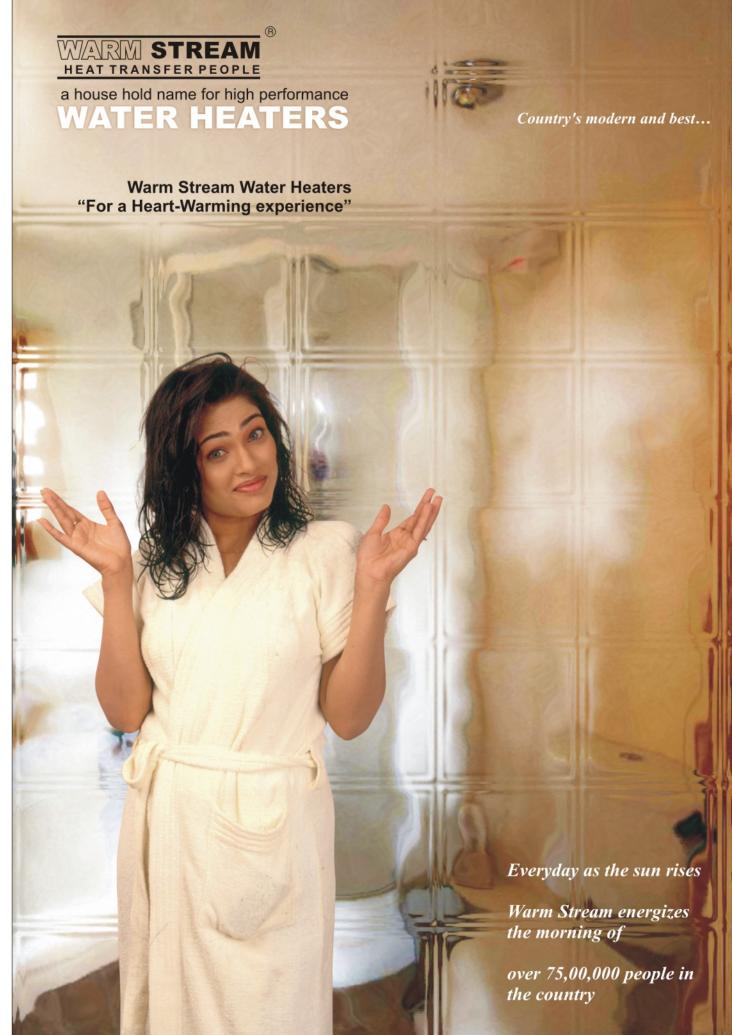

id.co.in


## SOLID FUEL FIRED- WATER HEATERS

It is said, "Luxury and Economy seldom go together." But we have made this possible by our innovative solid fuel fired Storage Water Heater, as it offers the luxury of hot water while ensuring economy of cost. It is a high-performance and eco-friendly water heater with a long life. Its design is patented and thus it is one its kind.

Our vast experience in the water heater industry coupled with application of latest heat transfer technology manifests in the Warm Stream Heater.

# SALIENT FEATURES

# WARM WATER FOR MULTI-PURPOSE USES

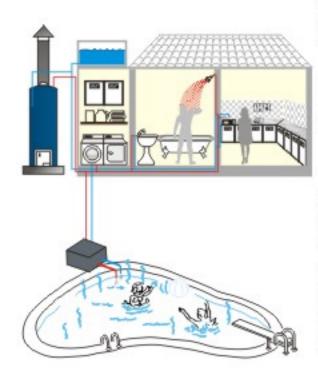

### Improved Thermal Efficiency

More than three and half decades of experience in the water heater industry gives the company a deep understanding of the evolving needs of the customer and the capability to leverage the rapid technological improvement in this

- Highest thermal efficiency
- An insulated storage tank saves heat and prevents it from dissipating in the atmosphere. It takes only 10 to 15 minutes to warm up from cold start and supply hot water.

#### Long Life / Low Maintenance

- The company provides excellent services to ensure complete customer delight.
- The water heater parts are stationary and the surfaces of parts that come in contact with heat are protected by water wall construction.
- It is fabricated with robust heavy gauge quality steel.

It works on inexpensive fuel like firewood, charcoal, agricultural, domestic and garden waste. It works as incinerator and solves your waste disposal problem.

#### SAFETY:

Warm Stream water heaters do not run on electricity and hence there is no case for power cuts and electric shock. Each water heater is hydraulically pressure tested.

Pressure relief through inlet connection and or pressure relief tapping connection for 225 litres & above capacities

Sr. No.	Fuel	Calorific value	Efficiency (%)	Price (Rs.)	Cost (Rs.)	Total expenses per day for an average requirement of 20 ltrs. of hot water per person (Rs.)		
1 Wood (Dry)		3900 K Cal/Kg	60	3.00/kg	6.41	1.28		
2	Charcoal	5500 K Cal/kg	70	15.00/kg	11.55	3.90		
3	Kerosene	9110 K Cal/kg	65	35.00/kg	29.55	5.91		
4	LPG	11700 K Cal/kg	75	24.50/kg	13.96	2.79		
5	Natural Gas	8600 K Cal/NM°	75	15.00/NM <sup>3</sup>	11.63	2.33		
6	Electricity	860 K Cal/kwh	95	6.00/kwh	36.72	7.34		

Above rates are based on market value at Vallabh Vidhyanagar as on 01.09.2009


#### INSTALLATION:

The water heaters are generally installed in the backyard or in a corner place of the house. No costly foundation is required to install the heater.

 CAUTION: Water heaters are made of mild Steel and hence it can give rusty water if the water is acidic or has chlorine in the water and/ or is overheated. In case of getting rusty water, ensure that it is not overheated, and if it still persists, get the water checked, whether it is acidic. If so, little alkaline solution (NaOH - i.e. caustic soda) can be added to the incoming cold water, so that the water becomes little alkaline. This is required to be done initially. Once the scale is formed on the inner surfaces and heating is controlled, there would not be a problem of rusty water.

#### ACCESSORIES:

Warm Stream Water heaters are supplied with Chimney stand, Chimney cover, Ash cleaning rod, Flue Tube cleaning rod and Fire grate as standard accessories. \*Commercial models 225Y & above capacities are also provided with Dial thermometer and Smoke collector in place of chimney cover.

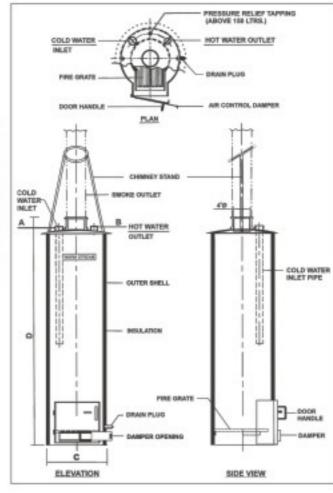

		0.0000000000000000000000000000000000000	350 March 2015 Control Control	**************************************		11,272,111	1000	-000
Model		Volumetric Capacity in Itrs.	Recommended number of hot water connections of 1/2 inch	No. Of maximum users (persons)	Cold Water inlet (A)	Water outlet (B)	Dia. MM. (C)	Ht. MM. (D)
WS	35X	35	9	1 to 4	1"	1/2"	315	1080
ws	50X	50	1 to 2	5 to 7	1"	1/2"	315	1250
ws	75X	75	2 to 3	8 to 10	1"	1/2"	315	1680
WS	100X	100	3 to 4	11 to 15	1"	1"	415	1350
ws	150Y	150	4 to 5	15 to 25	1"	1*	410	1920
WS	225Y	225*	6 to 10	26 to100	2"	2"	515	1800
WSI	300Z	300*	11 to 15	101 to 150	2"	2*	530	2130
WSI	500Z	500*	16 to 30	151 to 250	2"	2*	670	2170
WSI	700Z	700*	31 to 50	251 to 500	2"	2*	780	2170
WSI	1000Z	1000*	51 to 80	501 to 600	2"	2*	950	2170
WSI	1500Z	1500°	81 to 120	601 to 800	3"	3*	1325	2425
WSI	2000Z	2000*	121 to 150	801 to 1000	3"	3"	1400	2625

: We offer 125 to 500 litres per day Solar Water heaters for Domestic and Higher capacities for Solar water heater

commercial and industrial applications.

We offer fully automatic Gas Fired Water Heaters in 50, 100, 150, 300, 500, 700, 1000, Gas Fired Water heater

1500, 2000 litres & higher capicities.

Oil fired water heater Manual & Automatic oil fired water heater in above & higher capacities.

The company reserves the right to change dimensions without prior notice.

